



## Gasket-Sert™ PSP Filter



### Description

The Gasket-Sert PSP filter is designed to protect major components of gas panels employed in semiconductor gas distribution systems.

- True in-line design and easy installation
- Alignment retainer for ease of installation
- Fits in place of standard ¼" VCR<sup>1</sup> or ¼" UJR compatible gasket
- Broad compatibility with process gases
- Low differential pressure
- All 316L stainless steel construction
- Dried with high purity nitrogen
- Cleanroom packaged
- No hold-up volume
- No particle contribution above background
- No housing required
- Retrofit of existing panels without reconfiguring of systems
- Zero displacement
- Protection for regulators and MFCs

### Specifications

#### Materials

- Medium and gasket: 316L stainless steel

#### Removal Rating



- $\geq 0.4 \mu\text{m}$  at 99.9% efficiency

### Operating Conditions


- Recommended flow range:  
0-28 slpm / 0-1 scfm
- Maximum operating temperature:  
Inert gases: 300°C / 572°F  
Anhydrous corrosive gases:  
30°C / 86°F
- Maximum differential pressure:  
Inside out:  
690 kPa @ 20°C / 100 psid @ 68°F  
Outside in:  
1380 kPa @ 20°C / 200 psid @ 68°F

<sup>1</sup> VCR is a trademark of Swagelok Co.

## Pressure Drop vs. Gas Flow Rate

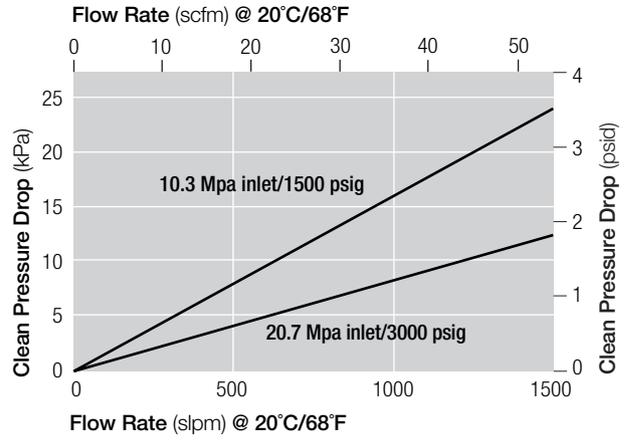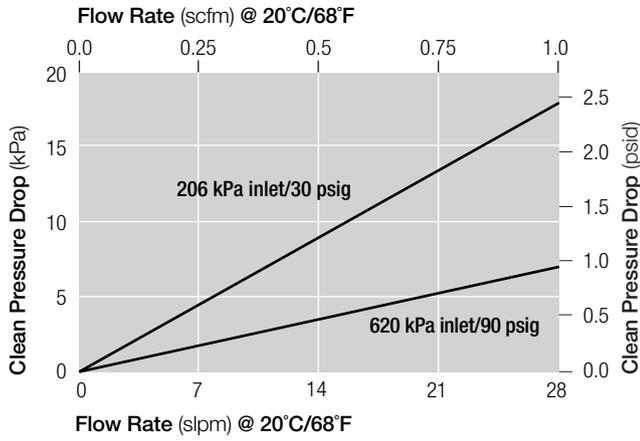

## Dimensions

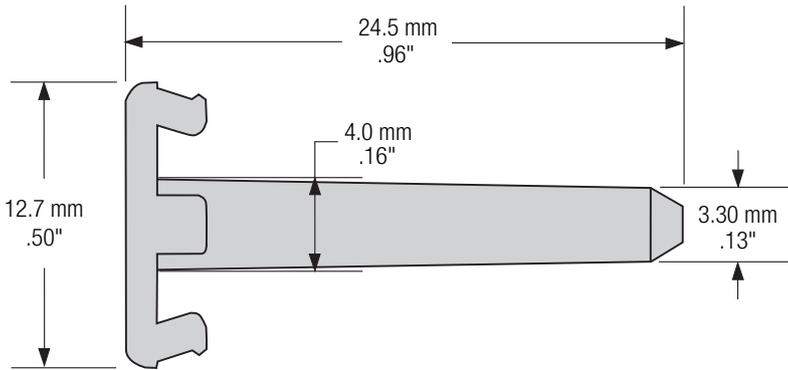

## Part Numbers/Ordering Information

Part Number	Material of Construction	Fitting Type
CNF1104USG4	All 316L stainless steel	¼" VCR or ¼" UJR

Unit conversion: 1 bar = 100 kilopascals